




## **EXAMPLE**

CAM	AMPS	PSI	GPM
.075	1.20	100	1.04

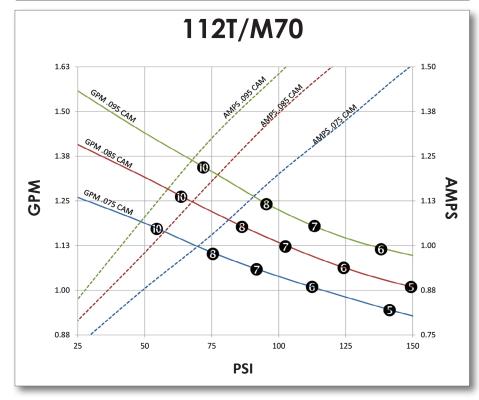

Data recorded pumping water at room temperature and 115V AC power. Actual performance will vary with voltage, application, and mfg tolerances. Copyright Pumptec, Inc. 2014

## Spraying Systems Co. nozzle sizes

\* Standard cams shown, more cams available upon request

## **SPECIFICATIONS**

Max Pressure (psi) 200
Open Flow (gpm) 1.68
Seals T-Seal
O-Rings Buna
Inlet Ports (2) - 1/4" NPT (F)
Discharge Ports (2) - 1/4" NPT (F)
Max Fluid Temp (°F) 140
Voltage 120VAC

## **MATERIALS**

Body Hardcoat Aluminum Plunger Stainless Steel Valves Stainless Steel Fasteners Stainless Steel Rectifier Inline

