




EXAMPLE

CAM	AMPS	PSI	GPM
.075	1.18	100	1.03

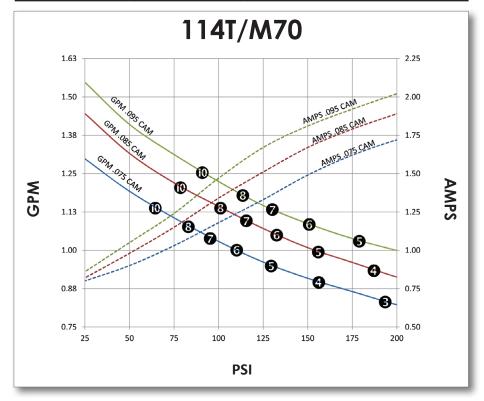

Data recorded pumping water at room temperature and 115V AC power. Actual performance will vary with voltage, application, and mfg tolerances Copyright Pumptec, Inc. 2014

Spraying Systems Co. nozzle sizes

SPECIFICATIONS

Max Pressure (psi) 200 Open Flow (gpm) 1.68

Seals T-Seal

O-Rings Buna

Inlet Ports (1) - 1/2" Hose Barb

(1) - 3/8" NPT (M)

Discharge Ports (2) - 1/4" NPT (F)

(2) - 1/4" NPT (M)

(1) - 3/8" Hose Barb

Max Fluid Temp (°F) 140

Voltage 120VAC

MATERIALS


Body Nylon


Plunger Stainless Steel


Valves Nylon

Fasteners Stainless Steel

Rectifier Inline







^{*} Standard cams shown, more cams available upon request